

Welding Electrodes

	SS Welding Electrodes		Mild Steel Electrodes		Chrome Moly, Cast Iron & Nickel Alloy Electrodes	
	E 307-16 E 308H-16 E 308L-15 E 308L-16 E 309Cb-16 E 309L-16 E 309L-15 E 309LMo-16 E 310-16 E 312-16	E 316L-15 E 316L-16 E 317L-16 E 318-16 E 347-15 E 347-16 E 385-16 E 2209-16 E 2594-16	E 6010 E 6011 E 6013 E 7016-H4 E 7016-1-H4	E 7016-A1-H4 E 7018-H4 E 7018 G-H4 E 7018-1-H4 E 7018-A1-H4	E 8018-G E 8018-B2 E 9018-B3 E 9018-G E 9018-M H4 E 10018-D2-H4 E 10018-G-H4 E 11018-G-H4	E 11018-M-H4 E NiFe-C1 E Ni-C1 E Ni-Cu-7 E NiCr Fe-2 E NiCr Fe-3 E NiCr Mo-3
			Straight Chrome			
			E 410-15	E 410NiMo-15		

★ Hardfacing and special alloy electrodes also available.

SS, MS, Nickel Alloy Wires

	SS Welding Wires (TIG / MIG & SAW)		SS Non Welding Wires for following Applications	
	AISI 304 /304L AISI 304LP ER 307 /307Si ER 308 /308L ER 308H ER 308LSi ER 309 /309L ER 309H ER 309LSi ER 309LMo ER 310 ER 312 ER 316 /316L ER 316H ER 316LMo ER 316LSi	ER 316LSiMo ER 317L ER 321 /321H ER 347 /347L ER 347Si /LSi ER 347H ER 385 /904L ER 409Cb/Nb ER 410 ER 410NiMo ER 420 ER 430 /430L ER 430LNb ER 2209 ER 2594	<ul style="list-style-type: none"> ★ Electro Polishing Quality Wires. ★ Spring Quality Wires. ★ Cold Heading Quality Wires. ★ Fabricated baskets, kitchen appliances, food industry, medical applications, decorative and architectural usages. ★ Wire ropes, chains, pins, bolts, hooks, spoke wires etc... 	
			MS & Nickel Alloys	
			<ul style="list-style-type: none"> ★ SUPERMIG 70S-6 ★ ER Ni-1 ★ ER NiCu-7 ★ ER NiCr-3 ★ ER NiCrMo-3 	<ul style="list-style-type: none"> ★ ER NiMo-3 ★ ER Ni-CI ★ ER NiFe-CI

★ Also Available in DIN /EN, JIS & GOST Standard (for details please visit on website)

Hardfacing Flux Cored Wires

Cladded Wear Plates

Welding Auxiliaries

	<ul style="list-style-type: none"> ★ Stainless Steel Pickling Gel
	<ul style="list-style-type: none"> ★ Die Penetrant Crack Detection Aerosol Sprays
	<ul style="list-style-type: none"> ★ Welders Anti Spatter CO₂ Aerosol Spray
	<ul style="list-style-type: none"> ★ Hot-dip Galvanizing Touch Up /Recoating Zinc Spray
	<ul style="list-style-type: none"> ★ General Use - Rust Penetration

Maintenance & Repair Coatings

	<ul style="list-style-type: none"> ★ FM approved, weather resistant non flammable, intumescent fire suppression coatings for power and instrumentation cables.
	<ul style="list-style-type: none"> ★ Hybrid co-polymer, fast drying paint for production machineries in high dust /low down time areas.
	<ul style="list-style-type: none"> ★ Wear resistant flooring, gangway marking & yellow lining for general industrial flooring.
	<ul style="list-style-type: none"> ★ Dielectric floor coating for control panel rooms (3.3 to 11 KV), bus bar coating, power transmission tower bars.
	<ul style="list-style-type: none"> ★ Superior performance system for oil soaked concrete coating & water proofing.


Wide Range of Approvals

International:



Packaging & Dimensions

Product Form	USA Packaging Specifications				Asia Pacific Packaging Specifications					
Coated Electrodes	Vac - Pack - AWS Marking									
	Dia (Inch)	Length (Inch)	Tube Qty (Lbs)	Carton Qty (Lbs)	Dia (mm)	Length (mm)	Tube Qty (Kgs)	Carton Qty (Kgs)		
	3/32	12/14	4	22	2.40-2.60	350	2/5	10/20		
	1/8	14/18	11	44	3.15/3.20	350/450	5/5	10/20		
	5/32	14/18	4/11	22/44	4.0	350/450	2/5	10/20		
	3/16	14/18	4/11	22/44	5.0	350/450	2/5	10/20		
TIG Wire	Plastic Tube - Imprinted with AWS, Diameter, Heat Number									
	Dia (Inch)	Length (Inch)	Tube Qty (Lbs)	Carton Qty (Lbs)	Dia (mm)	Length (mm)	Tube Qty (Kgs)	Carton Qty (Kgs)		
	0.30	39	10	40	0.80	1000	5	20		
	0.35	39	10	40	0.90	1000	5	20		
	0.39	39	10	40	1.0	1000	5	20		
	0.45	39	10	40	1.2	1000	5	20		
	1/16	39	10	40	1.6	1000	5	20		
	5/64	39	10	40	2.0	1000	5	20		
	3/32	39	10	40	2.4	1000	5	20		
	1/8	39	10	40	3.2	1000	5	20		
5/32	39	10	40	4.0	1000	5	20			
MIG & FCW Wire	Precision Layer Wound - Precise Cast & Helix (0.023inch /0.60mm-0.078inch /2.00mm)									
	Spool DIM	S100 (inch)	S200 (inch)	S270 (inch)	S300 (inch)	Spool DIM	S100 (mm)	S200 (mm)	S270 (mm)	S300 (mm)
	Flange O.D.	3.93	8	10	12	Flange O.D.	100	200	266	300
	Hub I.D	0.64	2.06	2.06	2.06	Hub I.D	16.4	52.5	52.5	52.5
	Outer Width	1.7	2.1	4.03	4.0	Outer Width	43	53	102.5	101
	STD Weight	2	10	33	33	STD Weight	1	5	15	15
SAW Wire	Superior Feedability									
	Metal Spool-K415 (inch)					Paper /Plastic Core (mm)				
	Flange O.D.					Flange O.D.				
	Hub I.D					Hub I.D				
	Outer Width					Outer Width				
	STD Weight					STD Weight				

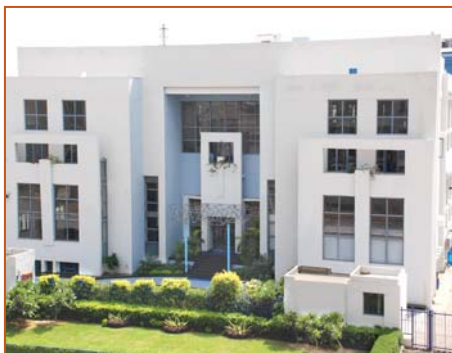

Welding Electrodes



Stainless Steel Wires



Hardfacing FCAW, Wear Plates, MS wires



SUPERON SCHWEISSTECHNIK INDIA LTD.

Corporate Office: 552, Sector - 37, Pace City - II, Gurgaon, Haryana - 122001, India

Tel.: (124) - 4940900

E-Mail Domestic : sales@superonindia.com, E-Mail International : export@superonindia.com

Web site : www.superonindia.com